
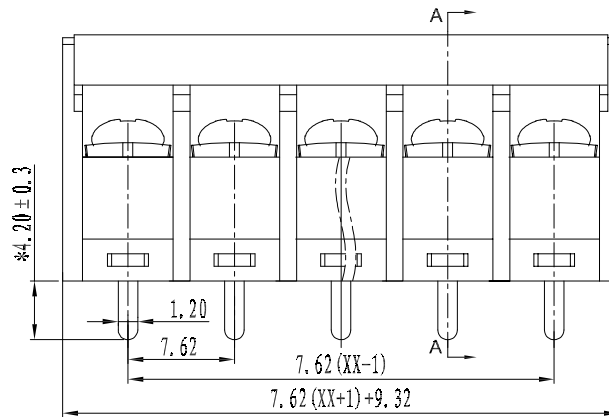
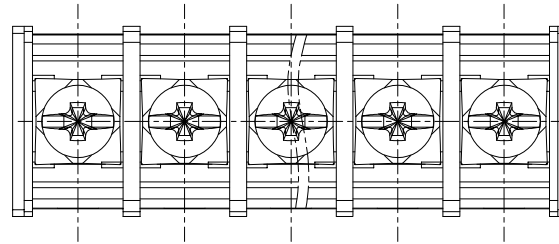
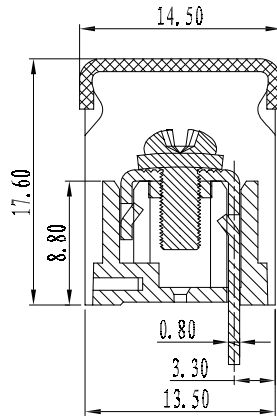


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

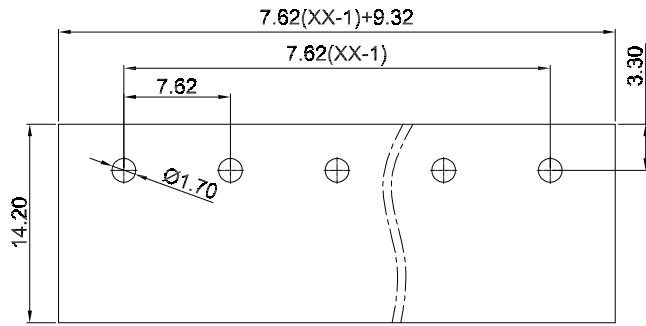

### 技术参数 (Technical Data)

应用组别(Use group)	B	C	D
UL 额定电器参数 (Rated Electrical Parameters)	300V/15A	300V/15A	300V/15A
过压类别(Overvoltage Category) /污染等级(Pollution Degree)	III/3	III/2	III/2
IEC 额定电器参数 (Rated Electrical Parameters)	250V/24A	250V/24A	250V/24A
压线范围(Wire Range)	/		
工频耐压(Frequency Voltage)	AC 2500V		
冲击耐压(Rated Surge Voltage)	4000V		
绝缘阻抗(Insulation Resistance)	DC500V 500MΩ above		
接触电阻(Contact Resistance)	≤20mΩ		
剥线长度(String Length)	10		
工作温度(Temperature)	-40° C--+105° C		
额定扭矩(Rated torque)	/		
材质和电镀(Material and plating)			
绝缘材质(Housing)	PA66		
导体材料(Contact)	铜合金, 镀锡(Copper alloy, Sn plsted)		
/	/		

产品命名编码:  
(Product Number Code):

**BT2.5-XX-762-28S - YY**

系列(Series) | 极数(NO. of poles) | 型号(Model) | 塑体颜色(Housing Color)

端子间距(Pitch)

- |              |               |
|--------------|---------------|
| 1:绿色(Green)  | 7:透明色         |
| 2:蓝色(Blue)   | (Transparent) |
| 3:黑色(Black)  | 8:白色(White)   |
| 4:灰色(Grey)   | 9:黄色(Yellow)  |
| 5:橙色(Orange) | Y:多种颜色        |
| 6:红色(Red)    | (Mixed color) |

P=7.62mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P
L	16.94	24.56	32.18	39.80	47.42	55.04	62.66	70.28	77.90
B	7.62	15.24	22.86	30.48	38.1	45.72	53.34	60.96	68.58
N	11P	12P	13P	14P	15P	16P	17P	18P	19P
L	85.52	93.14	100.76	108.38	116.00	123.62	131.24	138.86	146.48
B	76.2	83.82	91.44	99.06	106.68	114.3	121.92	129.54	137.16



东莞市澳斯电子有限公司  
DONGGUAN AOSI ELECTRONICS CO., LTD.

型号(Type): BT2.5-XX-762-28S-YY	公差范围(Tolerance Range)
核准(Approval): 图号(Drawing NO.):	150~ ±1.50
核审(Audit): 单位(Units):mm 页码(Page):1/1	60~150 ±1.00
设计(Design): 比例(Scale):FULL	30~60 ±0.60
	6~30 ±0.40
	0~6 ±0.25
	角度(Angle) X ±2°
	XX ±1°
	版次(Version):T0