
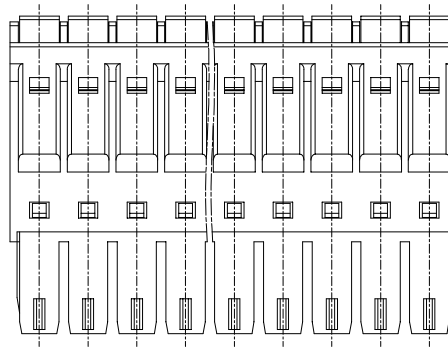
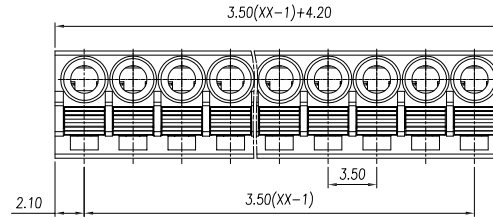
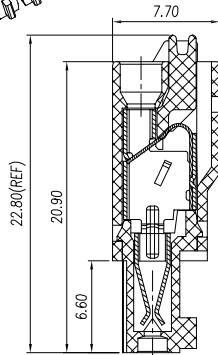


| 版次 (Version) | 变更内容 (Rev. Content) | 变更者 (Change Person) |
|-----------------|------------------------|------------------------|
| | | |
| | | |



| 技术参数 (Technical Data) | | | | |
|------------------------------|--|-----------------------------------|---------|---------|
| UL | 应用组别(Use group) | B | C | D |
| IEC | 额定电器参数 (Rated Electrical Parameters) | 300V/8A | 300V/8A | 300V/8A |
| | 过压类别 (Overvoltage Category) / 污染等级 (Pollution Degree) | III/3 | III/2 | III/2 |
| | 额定电器参数 (Rated Electrical Parameters) | 300V/8A | 300V/8A | 300V/8A |
| 压线范围 (Wire Range) | | / | | |
| 工频耐压 (Frequency Voltage) | | AC 1300V | | |
| 冲击耐压 (Rated Surge Voltage) | | 4000V | | |
| 绝缘阻抗 (Insulation Resistance) | | DC500V 500MΩ above | | |
| 接触电阻 (Contact Resistance) | | ≤20mΩ | | |
| 剥线长度 (String Length) | | / | | |
| 工作温度 (Temperature) | | -40° C--+105° C | | |
| 额定扭矩 (Rated torque) | | / | | |
| 材质和电镀 (Material and plating) | | | | |
| 绝缘材质 (Housing) | | PA66 | | |
| 导体材料 (Contact) | | 铜合金, 镀锡 (Copper alloy, Sn plated) | | |
| / | | / | | |

产品命名编码:
(Product Number Code):

FPS1.5-XX-350-02-YY

系列 (Series) ———— 型号 (Model)
极数 (NO. of poles) ———— 塑体颜色 (Housing Color)

端子间距 (Pitch) ————

- | | |
|---------------|----------------------|
| 1:绿色 (Green) | 7:透明色 (Transparent) |
| 2:蓝色 (Blue) | 8:白色 (White) |
| 3:黑色 (Black) | 9:黄色 (Yellow) |
| 4:灰色 (Grey) | Y:多种颜色 (Mixed color) |
| 5:橙色 (Orange) | |
| 6:红色 (Red) | |

P=3.50mm, N为孔位数 (N for hole digits), 有效位数为 (Significant Digits): 02p-19p

| N | 02P | 03P | 04P | 05P | 06P | 07P | 08P | 09P | 10P |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L | 7.70 | 11.20 | 14.70 | 18.20 | 21.70 | 25.20 | 28.70 | 32.20 | 35.70 |
| B | 3.50 | 7.00 | 10.50 | 14.00 | 17.50 | 21.00 | 24.50 | 28.00 | 31.50 |
| N | 11P | 12P | 13P | 14P | 15P | 16P | 17P | 18P | 19P |
| L | 39.20 | 42.70 | 46.20 | 49.70 | 53.20 | 56.70 | 60.20 | 63.70 | 67.20 |
| B | 35.00 | 38.50 | 42.00 | 45.50 | 49.00 | 52.50 | 56.00 | 59.50 | 63.00 |

| | | |
|--|------------------------|------------------|
| 东莞市奥斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD. | 公差范围 (Tolerance Range) | |
| | 150~ | ±1.50 |
| 型号 (Type): FPS1.5-XX-350-02-YY | 60~150 | ±1.00 |
| | 30~60 | ±0.60 |
| 核准 (Approval): | 6~30 | ±0.40 |
| | 0~6 | ±0.25 |
| 核审 (Audit): | 角度 (Angle) | X ±2° |
| | 单位 (Units): mm | X.X ±1° |
| 设计 (Design): | 图号 (Drawing NO.): | 页码 (Page): 1/1 |
| | 比例 (Scale): FULL | 版次 (Version): T0 |