
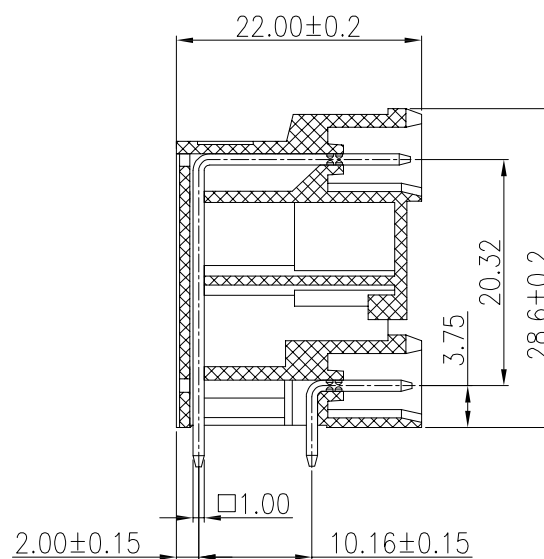
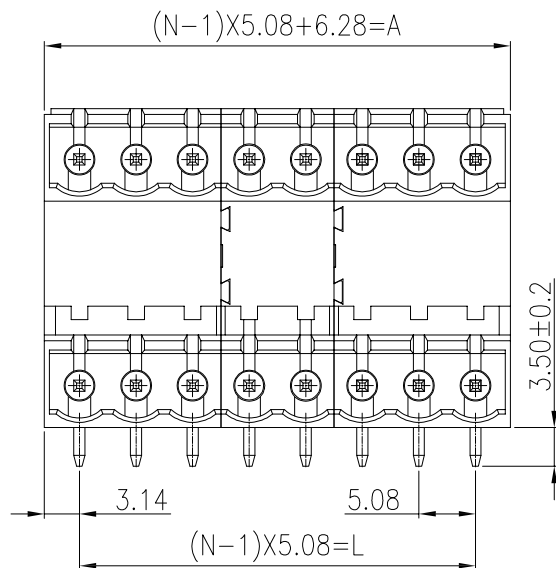


| 版次 (Version) | 变更内容 (Rev. Content) | 变更者 (Change Person) |
|-----------------|------------------------|------------------------|
| | | |
| | | |

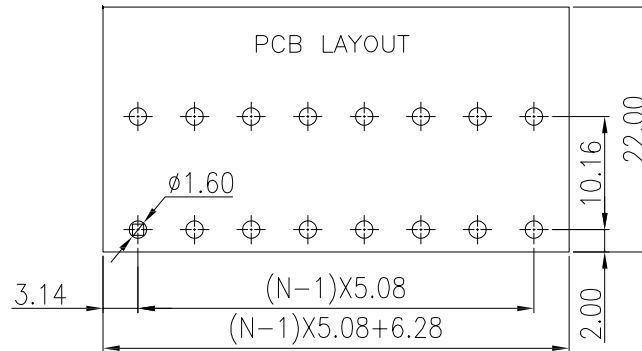

| 技术参数 (Technical Data) | | | | |
|-----------------------------|---|----------------------------------|----------|----------|
| UL | 应用组别(Use group) | B | C | D |
| IEC | 额定电器参数 (Rated Electrical Parameters) | 300V/15A | 300V/15A | 300V/15A |
| | 过压类别(Overvoltage Category) /污染等级(Pollution Degree) | III/3 | III/2 | III/2 |
| | 额定电器参数 (Rated Electrical Parameters) | 300V/15A | 300V/15A | 300V/15A |
| 压线范围(Wire Range) | | / | | |
| 工频耐压(Frequency Voltage) | | AC 2500V | | |
| 冲击耐压(Rated Surge Voltage) | | 4000V | | |
| 绝缘阻抗(Insulation Resistance) | | DC500V 500MΩ above | | |
| 接触电阻(Contact Resistance) | | ≤8mΩ | | |
| 剥线长度(String Length) | | / | | |
| 工作温度(Temperature) | | -40° C--+105° C | | |
| 额定扭矩(Rated torque) | | / | | |
| 材质和电镀(Material and plating) | | | | |
| 绝缘材质(Housing) | | PA66 | | |
| 导体材料(Contact) | | 铜合金, 镀锡(Copper alloy, Sn plsted) | | |
| / | | / | | |

产品命名编码:
(Product Number Code):

FPH2.5-XX-508-00R-YY

系列(Series) ————
极数(NO. of poles) ————
端子间距(Pitch) ————
型号(Model) ————
塑体颜色(Housing Color) ————

- | | |
|--------------|-------------------------|
| 1:绿色(Green) | 7:透明色 (Transparent) |
| 2:蓝色(Blue) | 8:白色(White) |
| 3:黑色(Black) | 9:黄色(Yellow) |
| 4:灰色(Grey) | Y:多种颜色 (Mixed color) |
| 5:橙色(Orange) | |
| 6:红色(Red) | |

P=5.08mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p

| N | 2*2P | 2*3P | 2*4P | 2*5P | 2*6P | 2*7P | 2*8P | 2*9P | 2*10P |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L | 11.36 | 16.44 | 21.52 | 26.60 | 31.68 | 36.76 | 41.84 | 46.92 | 52.00 |
| B | 5.08 | 10.16 | 15.24 | 20.32 | 25.40 | 30.48 | 35.56 | 40.64 | 45.72 |
| N | 2*11P | 2*12P | 2*13P | 2*14P | 2*15P | 2*16P | 2*17P | 2*18P | 2*19P |
| L | 57.08 | 62.16 | 67.24 | 72.32 | 77.40 | 82.48 | 87.56 | 92.64 | 97.72 |
| B | 50.80 | 55.88 | 60.96 | 66.04 | 71.12 | 76.20 | 81.28 | 86.36 | 91.44 |

| | | | |
|--|--|-----------------------|------------------|
| 东莞市奥斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD, | | 公差范围(Tolerance Range) | |
| 型号(Type): FPH2.5-XX-508-00R-YY | | 150~ | ±1.50 |
| | | 60~150 | ±1.00 |
| 核准(Approval): | | 30~60 | ±0.60 |
| | | 6~30 | ±0.40 |
| 核审(Audit): | | 0~6 | ±0.25 |
| | | 角度(Angle) | X ±2° X.X ±1° |
| 设计(Design) | | 单位(Units):mm | 页码(Page):1/1 |
| 比例(Scale):FULL | | 版次(Version):T0 | |