
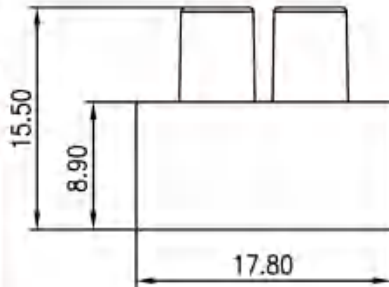
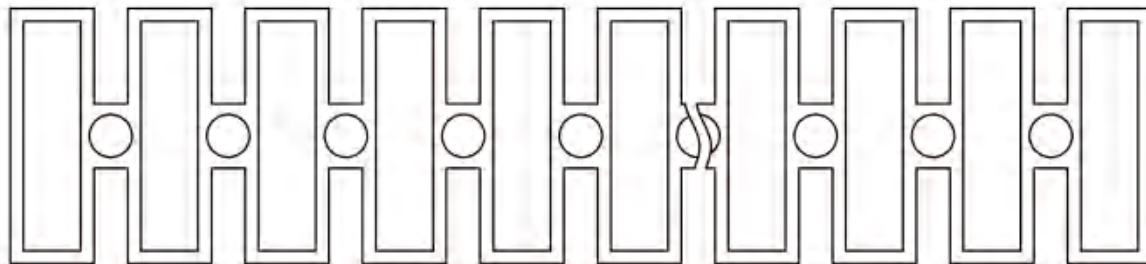


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

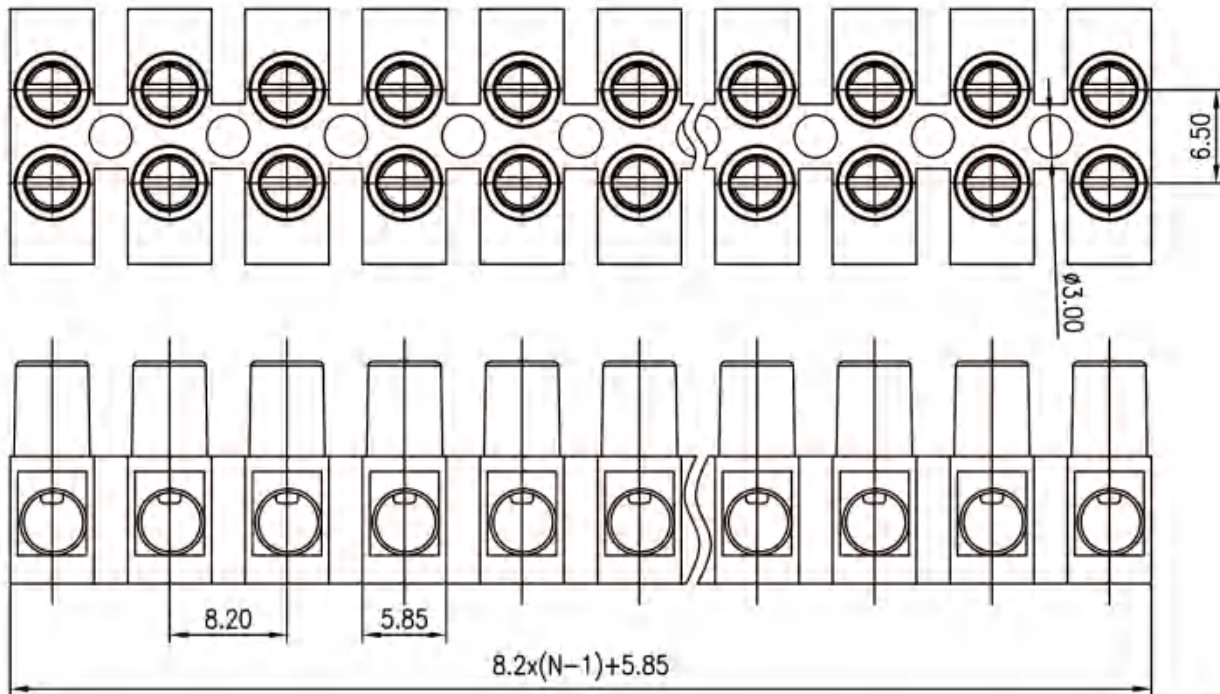

技术参数 (Technical Data)

应用组别(Use group)	B	C	D
UL 额定电器参数 (Rated Electrical Parameters)	450V/17.5A	450V/17.5A	450V/17.5A
过压类别(Overvoltage Category) /污染等级(Pollution Degree)	III/3	III/2	III/2
IEC 额定电器参数 (Rated Electrical Parameters)	450V/17.5A	450V/17.5A	450V/17.5A
压线范围(Wire Range)	/		
工频耐压(Frequency Voltage)	AC 2500V		
冲击耐压(Rated Surge Voltage)	4000V		
绝缘阻抗(Insulation Resistance)	DC500V 500MΩ above		
接触电阻(Contact Resistance)	≤20mΩ		
剥线长度(String Length)	/		
工作温度(Temperature)	-40° C--+105° C		
额定扭矩(Rated torque)	/		
材质和电镀(Material and plating)			
绝缘材质(Housing)	PA66		
导体材料(Contact)	铜合金, 镀锡(Copper alloy, Sn plated)		
/	/		

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	0.1/10
	6	10	24	30	60	100	150	∠
tolerance	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±2°



东莞市澳斯电子有限公司
DONGGUAN AOSI ELECTRONICS CO., LTD.

公差范围(Tolerance Range)

150~	±1.50
60~150	±1.00
30~60	±0.60
6~30	±0.40
0~6	±0.25
角度 X (Angle) X.X	±2°
	±1°

型号(Type): PA8

核准(Approval):

图号(Drawing NO.):

核审(Audit):

单位(Units): mm

页码(Page): 1/1

设计(Design)

比例(Scale): FULL

版次(Version): T0