


技术参数 (Technical Data)		
项目 (Item)	UL	IEC
额定电气参数 (Rated Electrical Parameters)	300V/6.3A	250V/6.3A
压线范围 (Wire Range)	22~14AWG	0.5~2.5mm²
工频耐压 (Frequency Voltage)	AC 2500V	
冲击耐压 (Rated Surge Voltage)	6000V	
绝缘电阻 (Insulation Resistance)	D500V 500MΩ above	
接触电阻 (Contact Resistance)	≤20mΩ	
剥线长度 (Stripping Length)	7mm	
工作温度 (Temperature)	-40°C~+105°C	
材质和电镀 (Material and plating)		
绝缘材质 (Housing)	PA66 (UL94 V-2)	
接线柱 (Contact Block)	铜合金, 镀镍 (Copper alloy, Ni plated)	
螺丝 (Screws)	钢, 镀锌 (Steel, Zn plated)	

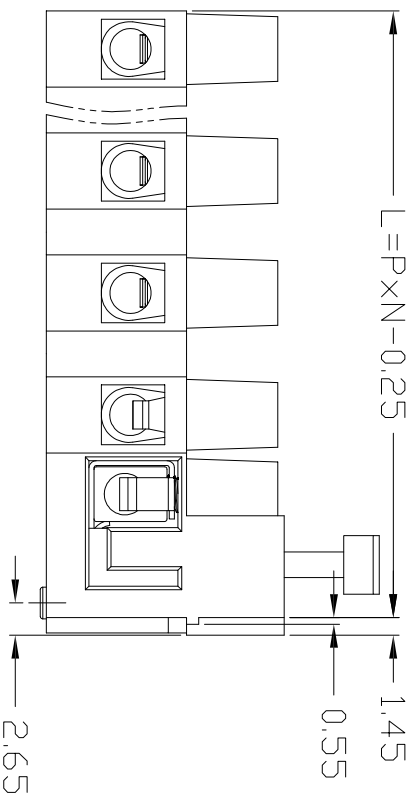

P=10mm, N为孔位数 (N for hole digits), 有效位数为 (Significant Digits): 03P~10P

N	03P	04P	05P	06P	07P	08P	09P	10P
L	29.75	39.75	49.75	59.75	69.75	79.75	89.75	99.75
B	16.50	26.50	36.50	46.50	56.50	66.50	76.50	86.50
C	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00

型号 (Type): F-S100-10.0		公差范围 (Tolerance Range)	
核准 (Approval):	图号 (Drawing NO.):	150~	±1.50
审核 (Audit):	单位 (Units): mm	60~150	±1.00
设计 (Design):	页码 (Page): 1/1	30~60	±0.80
	比例 (Scale): FULL	6~30	±0.40
		0~6	±0.25
		角度 (Angle)	X ±2°
			XX ±1°
		版本 (Version): T0	