

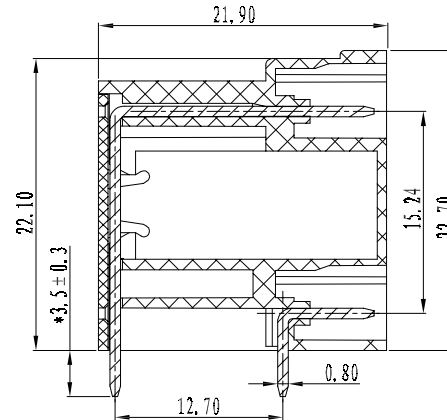


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

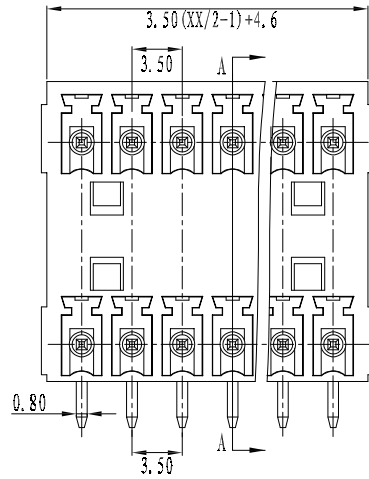

TOIFPANCFS FYCFPT AS NOTFD

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/8A	300V/8A	300V/8A
IEC	过压类别 (Overvoltage Category) /污染等级 (Pollution Degree)	III/3	III/2	III/2
	额定电器参数 (Rated Electrical Parameters)	300V/8A	300V/8A	300V/8A
压线范围(Wire Range)		/		
工频耐压(Frequency Voltage)		AC 2500V		
冲击耐压(Rated Surge Voltage)		4000V		
绝缘阻抗 (Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤8mΩ		
剥线长度(String Length)		/		
工作温度(Temperature)		-40° C--+105° C		
额定扭矩(Rated torque)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plsted)		
/		/		

产品命名编码:  
(Product Number Code):

FPH1.5-XX-350-00R-YY

系列(Series) ———— 型号(Model)  
极数(NO. of poles) ———— 塑体颜色(Housing Color)

端子间距 (Pitch) ————

- |              |               |
|--------------|---------------|
| 1:绿色(Green)  | 7:透明色         |
| 2:蓝色(Blue)   | (Transparent) |
| 3:黑色(Black)  | 8:白色(White)   |
| 4:灰色(Grey)   | 9:黄色(Yellow)  |
| 5:橙色(Orange) | Y:多种颜色        |
| 6:红色(Red)    | (Mixed color) |

P=3.50mm,N为孔位数(N for hole digits),有效位数为 (Significant Digits):02p-19p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P
L	8.10	11.60	15.10	18.60	22.10	25.60	29.10	32.60	36.10
B	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50
N	11P	12P	13P	14P	15P	16P	17P	18P	19P
L	39.60	43.10	46.60	50.10	53.60	57.10	60.60	64.10	67.60
B	35.00	38.50	42.00	45.50	49.00	52.50	56.00	59.50	63.00

<b>东莞市澳斯电子有限公司</b> DONGGUAN AOSI ELECTRONICS CO., LTD.		公差范围(Tolerance Range)		
		150~	±1.50	
型号(Type): FPH1.5-XX-350-00R-YY		60~150	±1.00	
		30~60	±0.60	
核准(Approval): 图号(Drawing NO.):		6~30	±0.40	
		0~6	±0.25	
核审(Audit):	单位(Units):mm	页码(Page):1/1	角度 X	±2°
			(Angle) X.X	±1°
设计(Design)	比例(Scale):FULL			
			版次(Version):T0	