


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

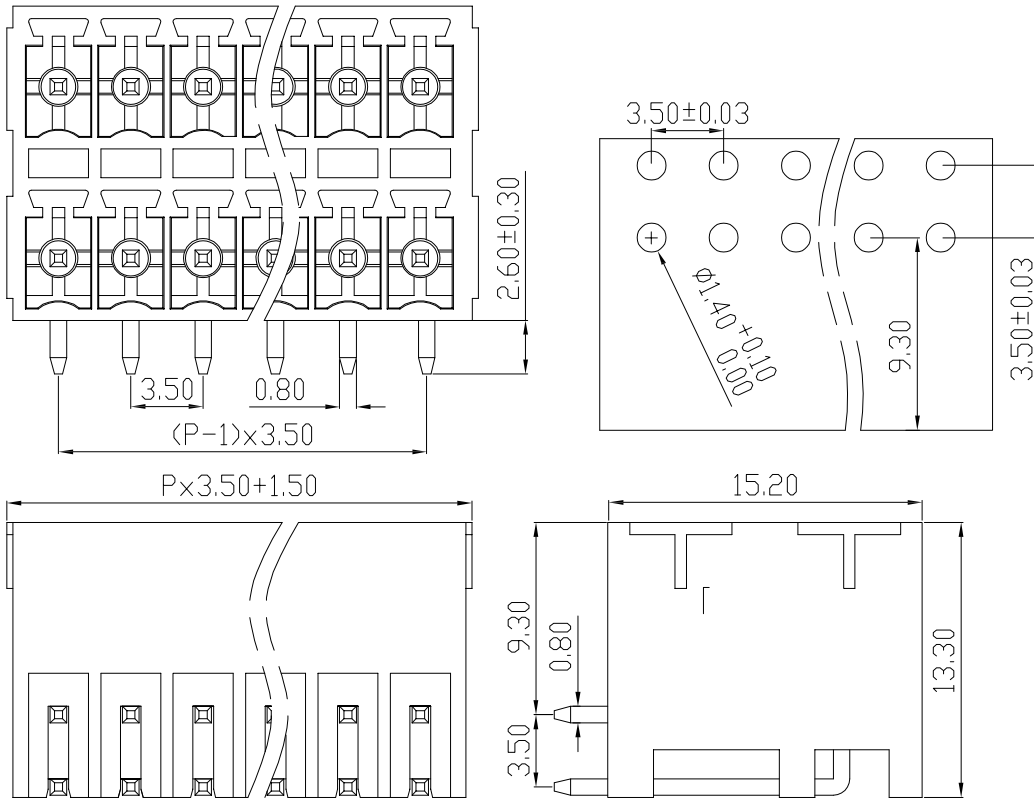

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/8A	300V/8A	300V/8A
IEC	过压类别(Overvoltage Category) /污染等级(Pollution Degree)	III/3	III/2	III/2
	额定电器参数 (Rated Electrical Parameters)	300V/8A	300V/8A	300V/8A
压线范围(Wire Range)		/		
工频耐压(Frequency Voltage)		AC 1300V		
冲击耐压(Rated Surge Voltage)		4000V		
绝缘阻抗(Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		/		
工作温度(Temperature)		-40° C--+105° C		
额定扭矩(Rated torque)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plated)		
/		/		

产品命名编码:  
(Product Number Code):

FPH1.5-XX-350-32R-YY


系列(Series) ———— 型号(Model)  
极数(NO. of poles) ———— 塑体颜色(Housing Color)

端子间距(Pitch) ————

- |              |               |
|--------------|---------------|
| 1:绿色(Green)  | 7:透明色         |
| 2:蓝色(Blue)   | (Transparent) |
| 3:黑色(Black)  | 8:白色(White)   |
| 4:灰色(Grey)   | 9:黄色(Yellow)  |
| 5:橙色(Orange) | Y:多种颜色        |
| 6:红色(Red)    | (Mixed color) |

P=3.50mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p

N	3*2P	3*3P	3*4P	3*5P	3*6P	3*7P	3*8P	3*9P	3*10P
L	8.50	12.00	15.50	19.00	22.50	26.00	29.50	33.00	36.50
B	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50
N	3*11P	3*12P	3*13P	3*14P	3*15P	3*16P	3*17P	3*18P	3*19P
L	40.00	43.50	47.00	50.50	54.00	57.50	61.00	64.50	68.00
B	35.00	38.50	42.00	45.50	49.00	52.50	56.00	59.50	63.00

 <b>东莞市澳斯电子有限公司</b> <b>DONGGUAN AOSI ELECTRONICS CO., LTD</b>	公差范围(Tolerance Range)	
	150~	±1.50
型号(Type): FPH1.5-XX-350-32R-YY	60~150	±1.00
	30~60	±0.60
核准(Approval):	6~30	±0.40
	0~6	±0.25
核审(Audit):	角度(Angle)	X ±2°
	单位(Units):mm	页码(Page):1/1
设计(Design)	比例(Scale):FULL	版次(Version):T0
	